



SWEeper ATTACHMENT




One Tough Animal™

Bobcat® Sweeper Attachment

Specifications

| Specifications | 44 in. | 54 in. | 60 in. | 72 in. | 84 in. |
|--------------------------|---|---------------------------|---------------------------|---------------------------|---------------------------|
| Sweep Width | 44 in. (1118 mm) | 54 in. (1372 mm) | 60 in. (1524 mm) | 72 in. (1829 mm) | 84 in. (2134 mm) |
| Overall Attachment Width | 48.8 in. (1240 mm) | 60.2 in. (1529 mm) | 66.2 in. (1681 mm) | 78.2 in. (1986 mm) | 89.9 in. (2284 mm) |
| Weight | 573 lb. (260 kg) | 696 lb. (316 kg) | 758 lb. (344 kg) | 845 lb. (383 kg) | 975 lb. (442 kg) |
| Bucket Capacity, Heaped | 6.1 cu. ft. (0.18 m³) | 10.8 cu. ft. (0.31 m³) | 12.0 cu. ft. (0.34 m³) | 14.4 cu. ft. (0.41 m³) | 18.5 cu. ft. (0.52 m³) |
| Bucket Capacity, Swept | 4.1 cu. ft. (0.12 m³) | 7.8 cu. ft. (0.22 m³) | 8.6 cu. ft. (0.24 m³) | 10.4 cu. ft. (0.29 m³) | 11.8 cu. ft. (0.33 m³) |
| Broom Diameter | 21.4 in. (544 mm) | 21.4 in. (544 mm) | 21.4 in. (544 mm) | 21.4 in. (544 mm) | 21.4 in. (544 mm) |
| Bristle Material | <div> <div>←</div> <div>Replaceable polypropylene sections (steel sections available)</div> <div>→</div> </div> | | | | |
| Cutting Edge | Replaceable steel | Replaceable steel | Replaceable steel | Replaceable steel | Replaceable steel |
| Broom rpm @ 10 gpm | 168 | 145 | 145 | 145 | 215 |

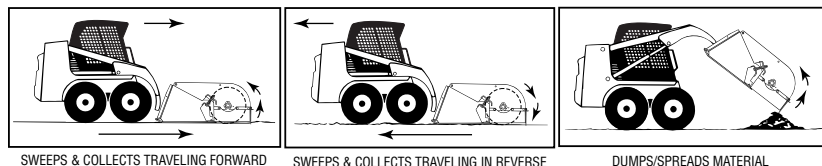

Clean hard-to-reach areas — curbs, drainage depressions, alongside buildings — with the optional Bobcat gutter brush attachment. It widens the sweeper's total width by one foot, to let you cover more area per pass. Large, metal bristles produce excellent cleaning action. When not in use, the gutter brush can be raised and stored vertically. The gutter brush may be installed on either side of the sweeper.

Gutter Brush Dimensions:

| Approved sweeper models: | 54, 60, 72 in. | 84 in. |
|--|----------------|---------|
| Brush diameter: | 24 in. | 24 in. |
| Reach in front of sweeper: | 26 in. | 35 in. |
| Reach to the side of sweeper: | 14 in. | 7.6 in. |
| Height from ground in sweeping position: | 22 in. | 19 in. |
| Height from ground in storage position: | 51 in. | 43 in. |

Only one gutter brush can be installed per sweeper.

Gutter Brush not approved for use with sweepers installed on 463 and 553 loaders.

Clean Up in Forward or Reverse!

Now you can sweep, collect and dump dirt and other debris with just one attachment. Ideal for construction, industrial or municipal jobs, the Bobcat sweeper is easy to attach and simple to operate going either forward or reverse.

The hydraulically driven attachment's reversible cutting edge helps cut through caked-on mud. The sweeper's polypropylene bristles deposit dirt and other debris in the bucket, which can be dumped when full.* You can also use the sweeper to spread material evenly across a site.

The Bobcat sweeper is perfect to clean parking lots, sidewalks, docks, warehouses, and more. There are five sizes to fit a variety of Bobcat loader models.

*Lift restrictions may apply.



APPROVED AND NON-APPROVED LOADER-SWEEPER COMBINATIONS

| APPROVED | | LIFT RESTRICTION | | | NON-APPROVED | | | |
|---------------------------------|---------------------|----------------------|----------------------|----------------------|----------------------|----------------------|-----------------------|-----------------------|
| LOADER RATED OPERATING CAPACITY | | | | | | | | |
| SWEEPER MODEL | 950 LB. (432 kg) | 1000 LB. (500 kg) | 1250 LB. (568 kg) | 1500 LB. (680 kg) | 1750 LB. (794 kg) | 1900 LB. (864 kg) | 2200 LB. (1000 kg) | 2500 LB. (1140 kg) |
| 54 in. | | | | | | | | |
| 60 in. | | | | | | | | |
| 72 in. | | | | | | | | |
| 84 in. | | | | | | | | |

**Lift restriction requires that loaded sweeper not be lifted more than 3 feet (1 m). Tipping can result.

*Sweeper attaches to 44 in. utility bucket.

NOTE - Where applicable, dimensions are in accordance with Society of Automotive Engineers (SAE) and ISO standards. Specifications and design are subject to change without notice. Pictures of Bobcat units may show other than standard equipment. All dimensions are given for loader equipped with standard tires. All dimensions are shown in inches. Respective metric dimensions are enclosed by parentheses. Bobcat Company complies with the requirements of ISO 9001 as registered with BSI.

*The Bobcat Attachments Advantage:
Bobcat attachments are engineered and*

Distribuidores Autorizados



Calle Uno - Mza. "A" - Lote 11 - Urb. Santo Tomás de Garagay
San Martín de Porres - Lima - Perú
Teléf.: 535-7393 / 556-2512 / Anexo: 21
Entel: 998 977 080
RPM: #999 158 686 / RPC: 989 806 750
E-mail: lacasadelbobcat@bobcatsservice.com
Web: www.bobcatsservice.com

BobCat's Service & Parts S.A.C.

Ventas - Repuestos - Servicio Técnico Especializado - Alquileres



B-1578 (9/07)

Bobcat Company
P.O. Box 6000 • West Fargo, ND 58078
www.bobcat.com

Printed in U.S.A.



Kn-5M-907-#10159-F

Bobcat Sweeper Attachment fits these carrier models:

Skid-Steer Loaders:

463
553
S100
S130
S150
S160
S175
S185
S205
S220
S250
S300
S330

Compact Track Loaders:

T140
T180
T190
T250
T300
T320

All-Wheel Steer Loaders:
A300

Utility Work Machine:
5600